


Geo-Mattress® UltraMax™

Category: Reactive Pressure Redistribution Support Surface

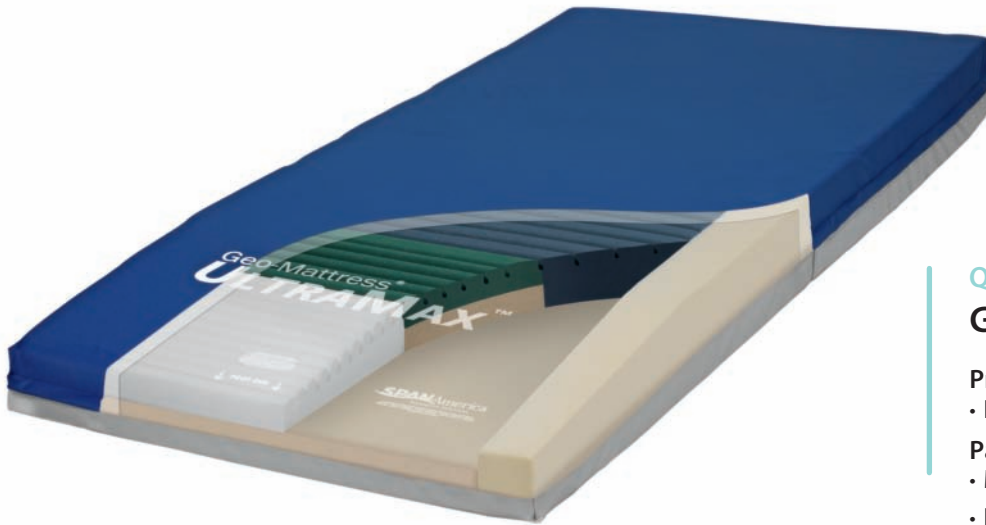

QUICK FACTS

Geo-Mattress UltraMax

Primary Use:

- Prevention and early intervention of pressure ulcers

Patient Indications:

- Moderate to high risk for skin breakdown
- Decreased mobility
- Repositions frequently by self or caregiver
- Stage I or II pressure ulcers¹

Key Advantages:

- Minimized shearing thru Geo-Matt® surface geometry and Shear Transfer Zones™ within stretch cover (see description on page 13)
- Outstanding comfort for longer, more restful sleep
- Superior in-bed mobility, caregiver ergonomics
- Enhanced durability, protection from “bottoming out”.

Designed to exceed even the most rigorous requirements of the acute care environment.

Precision-engineered to deliver critical performance advantages inside and out! On the outside, the individually articulating cells of the clinically proven Geo-Matt® top surface combine with Span-America’s proprietary Shear Transfer Zone™ design to provide unmatched protection from the harmful effects of microshear, macroshear and rotational shear. Helps reduce caregiver injury by “gliding” the user back to position following head of bed elevation. On the inside, the 3-Dimensional Zoning™ core design of the UltraMax provides anatomically calibrated levels of support and unmatched user comfort. And in the seat area – where the mechanical fatigue of bed gatching and concentrated user weight affect durability most – the unique cell structure of the high resiliency UHP 500™ layer provides a 55% higher Support Factor than found in typical medical grade foams. Viscoelastic foam and gentle Heel Slope® provide added protection at vulnerable heels.

Item

Description

| | |
|------------|--------------------------|
| UMX8036-29 | 80”L x 36”W x 6”H |
| UMX8436-29 | 84”L x 36”W x 6”H |
| UMX7536-29 | 75”L x 36”W x 6”H |
| UMX80CA-29 | 80”L for CareAssist® |
| UMX84CA-29 | 84”L for CareAssist® |
| UMX85V-29 | For recessed deck frames |

Weight:

24 lbs.

Mattress Weight Limit:

500 lbs.

Warranty:

8 years, all components. Non-prorated
All models conform to NFPA 101
(Life Safety Code™);
CPSC 16 CFR Parts 1632 and 1633;
Cal TB 117 & 129

Flammability:

¹ May also be appropriate for multiple Stage II or single Stage III ulcers, based on full assessment of skin status and repositioning required, according to best clinical practice and judgement.

